

TEX

Denomination: **HIGH PERFORMANCE WOOD SCREW**

Codes: **TEXBT, TEXBP, TECBT, TEXZT, TEXZP, TEXAB**








Reference: **FT TEX-en**

Date: **13/07/18**

Revision: **5**

Page: **8 of 12**

2.6 TEX-A2 Stainless steel wood screw Tx recess

	MATERIALS & GEOMETRY		
	 Stainless Steel A2	 Tx	 Serrated S Tip
CHARACTERISTICS	BENEFITS		
<ul style="list-style-type: none"> Stainless steel A2 Countersunk head and y S tip. Tx recess Interior countersink, fully threaded and ultra-sharp tip for the entire range of measures. Application: Fixing ironwork to wood, joining wood structures to each other, fixing reinforcing metal joints to wood, load-bearing wood structures. 	 CE Marking	 Patent	 Installation with screwdriver
	DIAMETER Ø 5.0		
dk: head diameter	[mm]	7.5	
L: lengths	[mm]	50 - 70	
D: external thread diameter	[mm]	5.0	
d: inside thread diameter	[mm]	3.3	
p: thread pitch	[mm]	2.2	
Tx recess		T25	
Installation bit code		PUTO25	





Figure A: Interior countersink 5.0

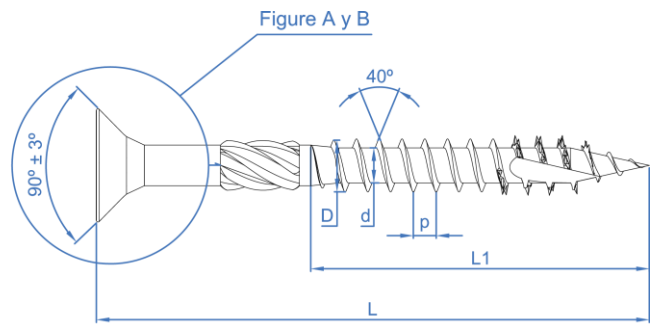