

2.11 TO-GU

Channel stud nut




Material	Coating	Valid for
		
Steel	Zinc-plated	Slotted channel GP-G

Installation data

Code	ØA	B	D	E	H	Valid for
TG230620	M6	4	23	13	20	20/10 - 25/08 - 25/11 - 27/18
TG230820	M8	5	23	15	20	27/18 – 28/30
TG230830	M8	5	33	15	30	27/18 – 28/30
TG340830	M8	5	33	15	30	38/40 – 40/20
TG341030	M10	5	33	15	30	38/40 – 40/20

Drawing

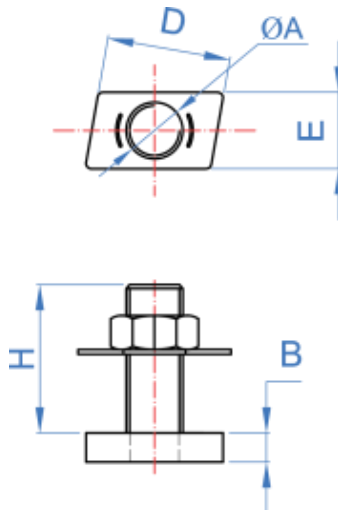

Maximum recommended sliding and tension loads

Code	Channel	Installation torque [Nm]	Sliding load [kN]	Tension load [kN]
TG230620	GPG271812	8.1	0.51	0.43
TG230830	GPG271812	14.9	0.75	1.83
TG230620	GPG283018	8.1	0.40	0.55
TG230830	GPG283018	14.9	0.52	2.77
TG340830	GPG384020	14.9	0.82	3.52
TG341030	GPG384020	25.8	0.84	3.08
TG340830	GPG402015	14.9	0.81	2.45
TG341030	GPG402015	25.8	0.92	1.64
TG230620	GPZ250808	8.1	0.96	0.49
TG230830	GPZ250808	14.9	1.05	0.67